

Authorised Distributor



**MIBOXER®** | Mi·Light  
Subordinate New Brand

## 5-Channel High Performance Amplifier Model No.: PA5

### 1. Product photo



### 2. Introduction

PA5 is a newly updated high performance 5-channel signal amplifier. Adopt high speed optical coupler with 10Mbps output rate; it can output the signal of main controller completely and synchronously. This products work on all PWM series LED controllers in market; Made from the big current MOSFET to assure the high rate output. Everytime you add one more amplifier, you can connect twice as many as LEDs. Theoretically, it can connect countless amplifier, input and output is with optoelectronic isolation. Working with main controller can satisfy the application requiring large power, wide range and synchronization area.

### 3. Specifications

Model No.: PA5

Working Temperature: -20~60°C

Input / Output Voltage: DC12V/24V

Output Current: 6A/Channel



Total Output Max: 15A

Switching Rate: 10Mbps


Connection: Common anode

Size: 115\*48\*27mm

Weight: 83g



### 4. Application Diagram

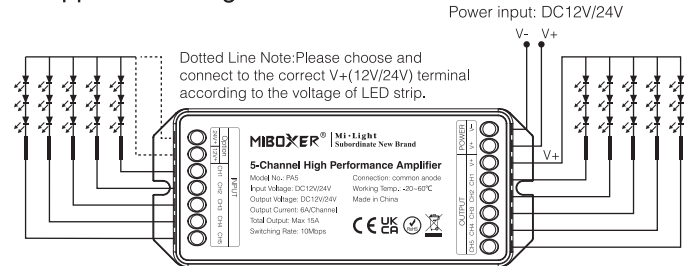

**Attention:** LED strip must be DC12V or 24V.

### 5. Attention

1. Please check whether the input voltage of the constant voltage power supply is in accordance with the controller, and please check the connection of both the cathode and anode, otherwise the controller will be broken.
2. Please don't connect wires with power on. Please turn on again only when it is in right connection and no short circuit.

### To User:

1. Welcome use Futlight products. Before using our products, pls read the instructions carefully. If you have started to operate the products, we think you have read the instructions.
2. Futlight Optoelectronics Co., Ltd have the final explanation and modification right of all products; if there is modification, we will not inform customers.



www.epiLED.com

brought you by epiLED