


# LED Strip Flex-120



- high density LED strip with **universal use**
- high quality **selected SMD diodes** with long life span
- **uniformity of light** in each of your projects
- **2-layer PCB** substrate for high protection against overheating
- **3M** double-sided adhesive tape
- for **indoor use**

## DIMENSIONS

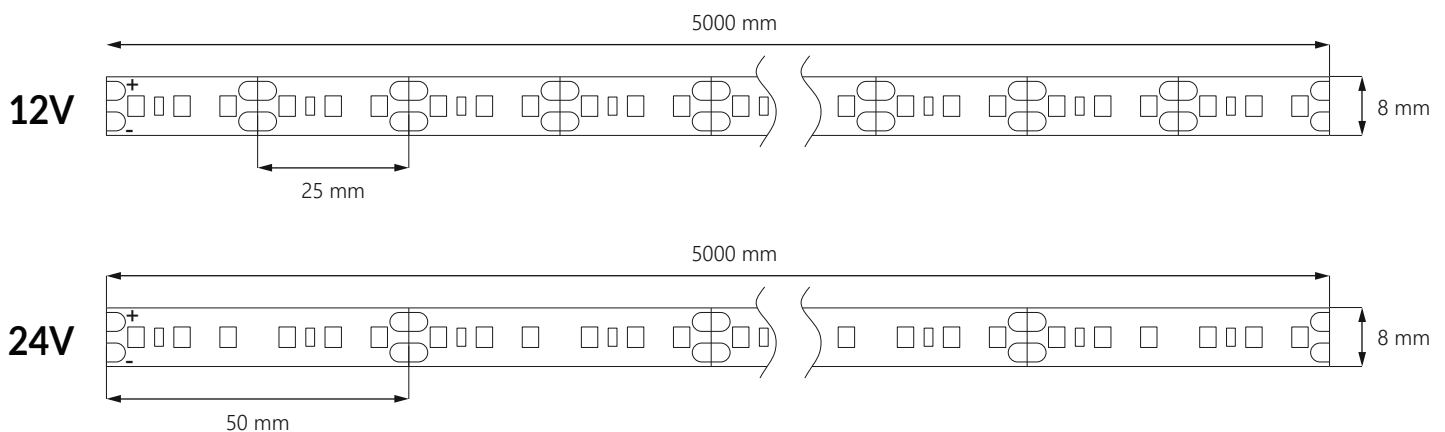


# TECHNICAL SPECIFICATION

Input voltage	12V DC   24V DC
Nominal power usage	9.6 W/m
Luminous Flux (for WH colour)	100 lm/W
Max power section	5 m
Colour rendering index	>80
Beam angle	120°
Dimmable with PWM controller	YES
Strip width	8 mm
Cutting section	12V: 2,5 cm   24V: 5 cm
Reel length	5 m, 25 m, 50 m
Type of diode	SMD2835
Density	120 SMD/m
PCB	2 oz
Installation	double-sided adhesive tape + mounting glue
Lifespan	~50000 hours
Working temperature	-20°C ÷ +40°C
IP rating	IP20
Compliance with standards	CE / RoHS / WEEE
Warranty	3 years

## POSSIBLE COLOURS\*



Light colour	CCT [K]	Luminous flux [lm/m]	Luminous efficacy [lm/W]	Energy class
WW	2800-3200	1041	115.7	F
NW	3800-4200	1035	115.4	F
WH	6000-6500	857	103.2	F
CW	9000-14000	981	109	F

## EPREL

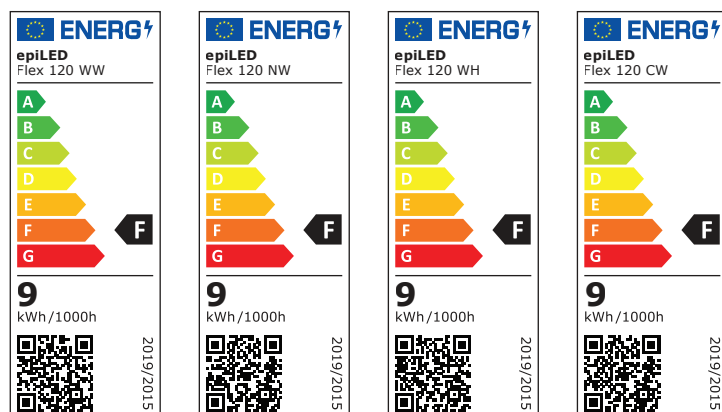


\* ask our sales team for details of available colours

# MAXIMUM POWER SECTION

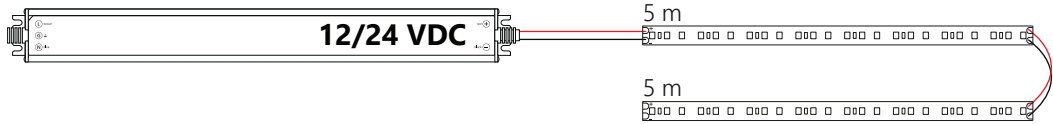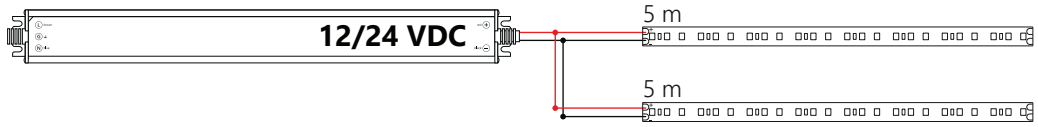

# CONNECTION DIAGRAM

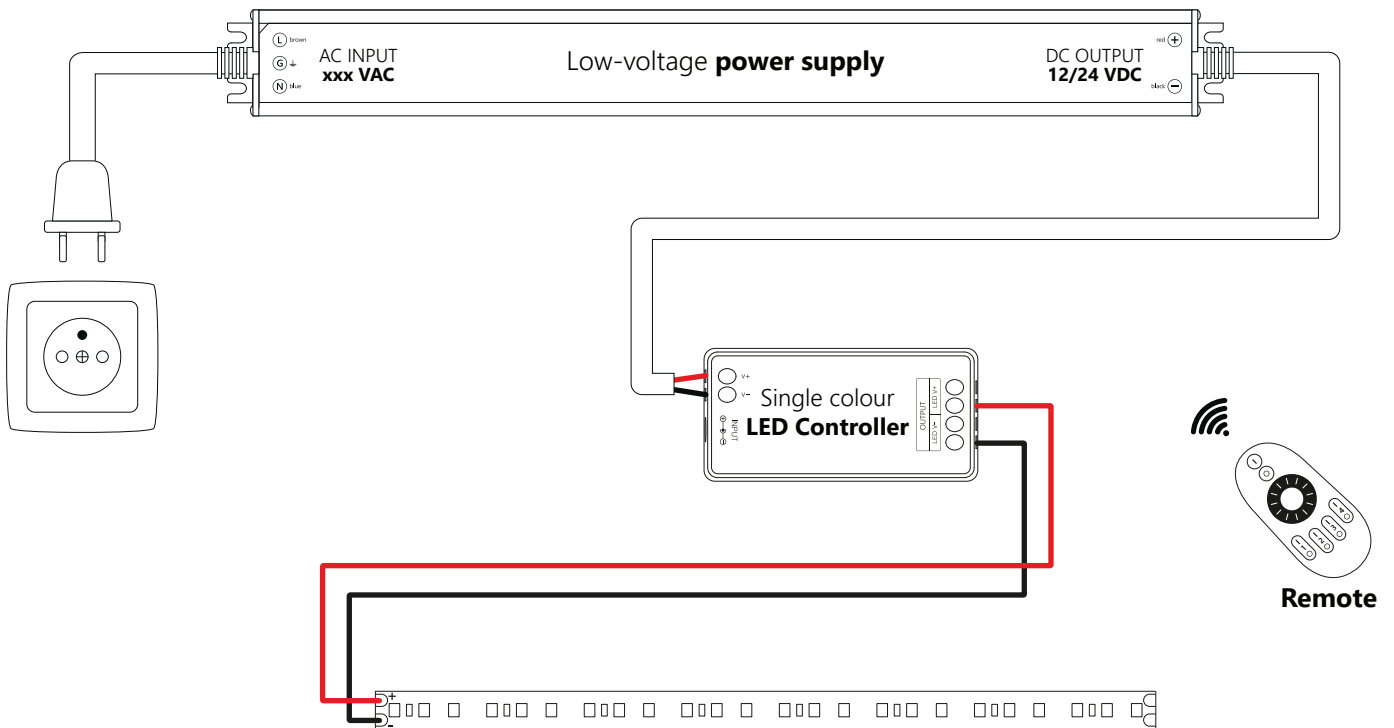

# TERMS AND CONDITIONS OF USE

1. Each LED strip is packed in an anti-static bag to protect the LEDs from damage. Unused strip must not be outside the bag.
2. Before installing the LED strip, dissipate the charges from the body and clothing by touching the grounded metal part.
3. Check the proper operation of the LED strip before installation (its colour and uniformity of light).
4. LED strip is not suitable for outdoor use (regardless of the declared degree of IP rating) and can not be used in areas exposed to direct weather and human exposure.
5. To preserve the lifespan of LED strips should be mounted only on surfaces that dissipate heat well (such as aluminum profiles) previously degreased and cleaned.
6. Supply the LED strip according to the specifications and information on the label. Pay special attention to the maximum strip power section specified in the product data sheet.
7. When shortening the LED strip, remember that you can only cut it in the places marked on the backing.
8. It is forbidden to bend the LED strip in a different angle than the one in which it was wound on the reel.
9. The distance between the LED strip and the power supply should be as small as possible.
10. The power supply used in the installation should have a power reserve of not less than 15%.
11. Before soldering the wire to the LED strip, whitewash the ends first. LEDs are very sensitive to high temperatures and incompetent soldering can damage them.
12. For greater durability, in addition to double-sided adhesive tape, you should also use mounting glue when gluing the LED strip.
13. It is forbidden to press directly on the LEDs during installation.
14. When connecting the LED controller / power supply, it is necessary to maintain polarity.
15. **Non-compliance with the above recommendations will result in loss of warranty.**

## DOWNLOAD

### EU Declaration of Conformity

<https://www.epiled.pl/download/deklaracje/eu-declaration-of-conformity-led-strips.pdf>