


**MIBOXER®** | Mi-Light  
Subordinate New Brand

**RGB LED Controller** (Model No.: FUT037S)  
**RGBW LED Controller** (Model No.: FUT038S)

### Features

Controller adopt the widely used 2.4GHz wireless technology with the features of low power consumption, long signal transmitting and strong anti-interference, etc. Controller has auto-transmitting and auto-synchronizing function. Widely used on the controlling of hotel lighting and home lighting.

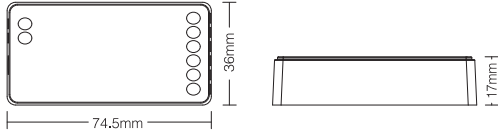


### RGB LED Controller

**Model No.: FUT037S**

Working Voltage: DC12V~24V      RF: 2.4GHz  
Output: 6A/Channel                      Max Controlling Distance: 30m  
Total Output: Max 12A                 Working Temperature: -10~40°C  
Output Connection: Common anode

- 16 Millions of colors to choose
- Remote control Control distance 30m
- Mix Red, Green and Blue light to adjust color temperature
- Smartphone APP control (2.4GHz gateway is needed)
- Dim brightness / saturation
- Support third party voice control (2.4GHz gateway is needed)
- 2.4G RF wireless transmission technology

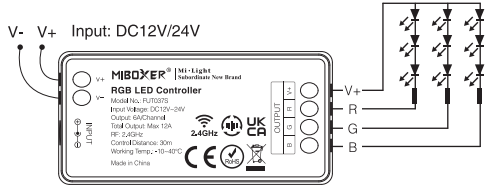


### RGBW LED Controller

**Model No.: FUT038S**

Working Voltage: DC12V~24V      RF: 2.4GHz  
Output: 6A/Channel                      Max Controlling Distance: 30m  
Total Output: Max 12A                 Working Temperature: -10~40°C  
Output Connection: Common anode

- 16 Millions of colors to choose
- Remote control Control distance 30m
- Dim brightness / saturation
- Smartphone APP control (2.4GHz gateway is needed)
- 2.4G RF wireless transmission technology
- Support third party voice control (2.4GHz gateway is needed)

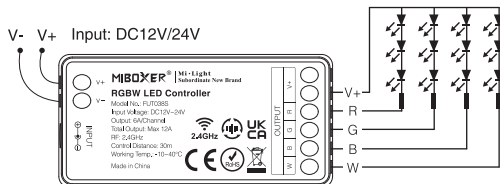

### Dynamic mode table 1 (default)

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

### Dynamic mode table 2 (need to switch manually)

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Colors gradual change	Adjustable
2	White light Gradual change	
3	RGB gradual change	
4	Seven colors jump to change	
5	Jump to change randomly	
6	Red light gradual change +Flash 3 times	
7	Green light gradual change +Flash 3 times	
8	Blue light gradual change +Flash 3 times	
9	White light gradual change +Flash 3 times	


### Signal transmitting

One strip controller can transmit the signals from the remote control to another controller within 30m, as long as there is a strip controller within 30m, the remote control distance can be limitless.

### Modes synchronization


Different controllers can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

The same dynamic mode, the same speed can be synchronized.

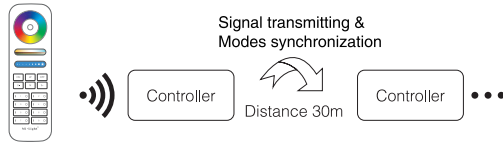

### Link/Unlink

Compatible with these remote controls (Purchase separately)

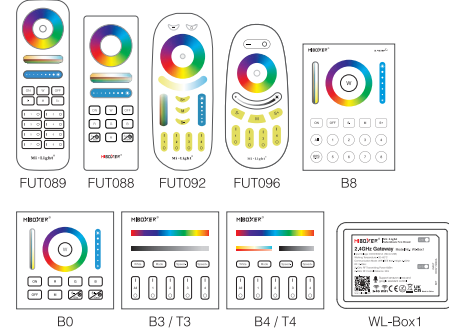

Light will work after linking with remote control; for more details, pls read the remote instruction.

### PWM high frequency / low frequency switching

**Switch to high frequency (8KHz):** on the condition of turning on the light

1. Short press the "OFF" button of the remote control once;
2. Short press the "ON" button 5 times within 3 seconds, the white light blink 2 times quickly, indicating successfully.

**Switch to low frequency (500Hz):** on the condition of turning off the light

1. Short press the "ON" button of the remote control once;
2. Short press the "OFF" button 5 times within 3 seconds, the white light blink 2 times slowly, indicating successfully.

### Dynamic mode table selection

**Select dynamic mode table 1:** The controller is powered off for 10 seconds and then powered on. Within 3 seconds, press the "S+" button 5 times, the blue light blink 3 times slowly, indicating successfully.

**Select dynamic mode table 2:** The controller is powered off for 10 seconds and then powered on. Within 3 seconds, press the "S-" key 5 times, and the yellow light blink 3 times slowly, indicating successfully.

### Attention

1. Please check whether the voltage of the power supply is in accordance with the controller, and please check the connection of both the cathode and anode, otherwise the controller will be broken.
2. Please don't connect wires with power on. Please turn on again only when it is in right connection and no short circuit.
3. Please do not use the controller in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be seriously affected.